


Model No.	POS.1	POS.2	POS.3
ZMS1	ON	NONE	ON
Term. Comm.	2-3		2-1
SCHEMATIC		OPEN	

SWITCH FUNCTION

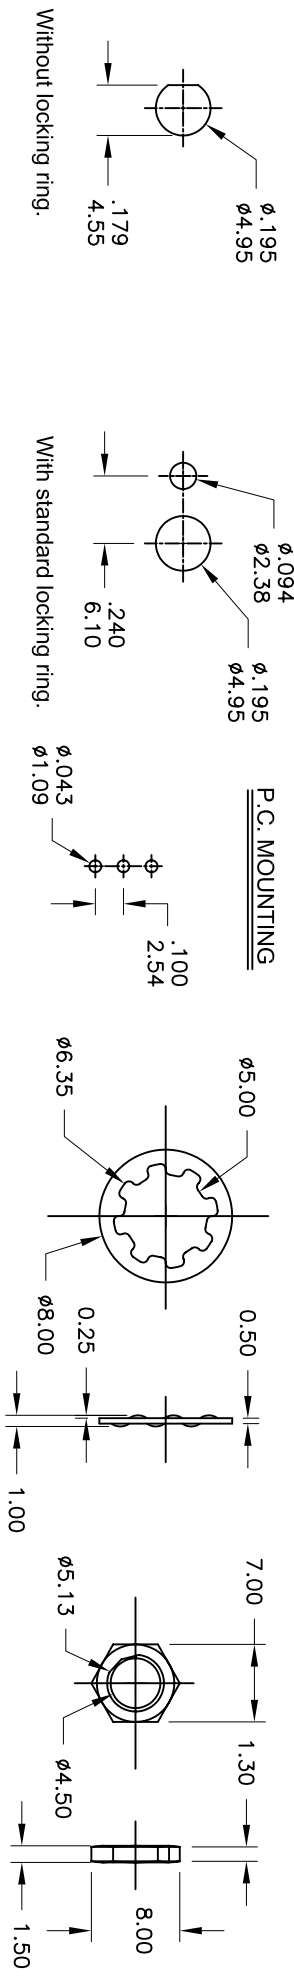

PANEL MOUNTING

SPECIFICATIONS

MECHANICAL LIFE: 30,000 make-and-break cycles.
CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ/min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30° C to 85° C.

MATERIALS

CASE - Diallyl phthalate(DAPY) UL94V-0)
ACTUATOR - Brass,chrome plated
BUSHING - Brass,nickel plated
HOUSING - Stainless Steel
SWITCH SUPPORT - Brass,tin plated.
TERMINALS/CONTACT - Brass, with Silver or gold plated.

符號	原尺寸	修改後尺寸	變更日期
1	(A)		
2	(B)		
3	(C)		
4	(D)		
5	(E)		

SCALE (比例): 3 : 2

TOLERANCE (公差):
 0.00 mm ± 0.25mm
 0.0 mm ± 0.40mm
 ANGULAR: ±5°

FILE NAME: 2MSP0343

东莞市创恩电子有限公司

RATING:

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
 Q : 1Amp @250VAC
 3Amps @120 VAC or 28 VDC

TITLE 圖名	Sub - Miniature Toggle Switches	SIZE 圖紙	A4
DWG NO. 圖號	2MS1T2B1M2QES-1	UNIT 單位	inch
REV. 版本	A	DATE 日期	AUG - 23 - 2006
CHECKED BY 審核	RICHARD	DRAWN BY 製圖	ODA
SHEET 張數	1 of 1		